

Scalewatcher®



The solution for milk stone problems in the dairy sector



Milk producing farmers spending a lot of money on cleaning milk lines to remove milk stone every year.



The Scalewatcher is the environmentally friendly method for the removal of milk stone and reduces maintenance costs.

The Scalewatcher is easily installed and requires no plumbing, no maintenance and no chemicals.

Improves the registration of flow meters.

Removes existing milk stone deposits.

Reduces bacteria growth in milk.

Prevents formation of milk stone on sensors of milking machines.

Saves on costs for chemicals and maintenance.

Paid for itself in less than a year.

Performance guarantee and best warranty in the industry.



Advantages of the Scalewatcher

- Non-invasive.
- Uses no chemicals.
- Requires no maintenance.
- No changes in milk quality.
- Consumes very little electricity.
- Shorter cleaning time.
- Capital equipment last longer.




Scalewatcher®



The solution for milk stone problems in the dairy sector

How does it work?

The electronic unit works by inducing a complex modulated signal which agitates the charged particles in the milk. This has an influence on initial nucleation, resulting in more crystals with smaller size and rounded surfaces.

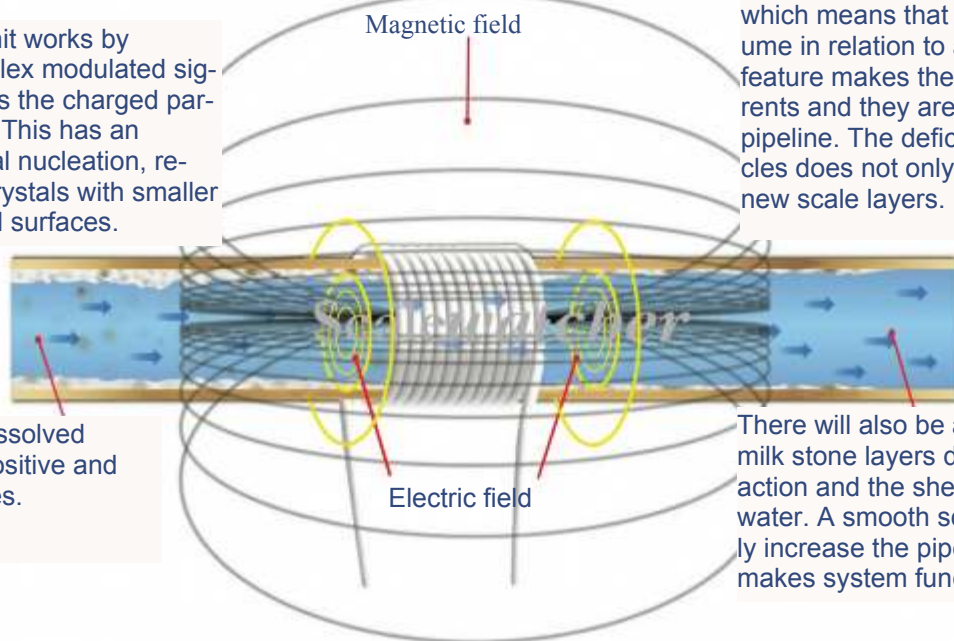

This treatment creates idiomorphic, scattered crystals, which do not form matted structures. They have a rotundas shape, which means that they have a larger volume in relation to a smaller surface. This feature makes them sensitive to milk currents and they are easily flushed out of the pipeline. The deficit of active scaling particles does not only prevent formation of new scale layers.

Particles and dissolved minerals with positive and negative charges.

There will also be a slow reduction of old milk stone layers due to the law of mass action and the sheer force of the flowing water. A smooth scale reduction will slowly increase the pipe capacity and so makes system functioning more efficient."

Technical Specifications

Components:

Each model comprises of a Scalewatcher unit, signal cable, ties, plugs and clear instructions.

Power:

Units can be connected to either 110 VAC or 230 VAC 50/60 Hz. Optional: Solar power or 24 Volt direct current.

Materials:

Electronics hermetically sealed. Enclosures for indoor use are made of high grade thermoplastic. Enclosures for outdoor use are made weatherproof.

Controls & Indicators:

All units have indicators showing correct operation, providing power applied and signal coil connected.

Reliability:

Only high quality electronic components are utilized, including a custom designed chip (IC) controlling signal generation processing. Components have a life span of over 20 years.

Safety:

The Scalewatcher conforms to electrical safety standards. The electronics are sealed with resin. The output is safe to both personnel and sensitive equipment. There is no electrical contact between pipe and coil. The low output voltage is non hazardous.

Scalewatcher systems are also available for domestic, commercial, Industrial and agricultural applications capable of treating pipe work ranging from 5 mm to 3000 mm irregardless of flow rate.

Ten years warranty for the residential models, five year for all other models.

Your supplier:

